


**KNF 336i Radius and Hoisting height**

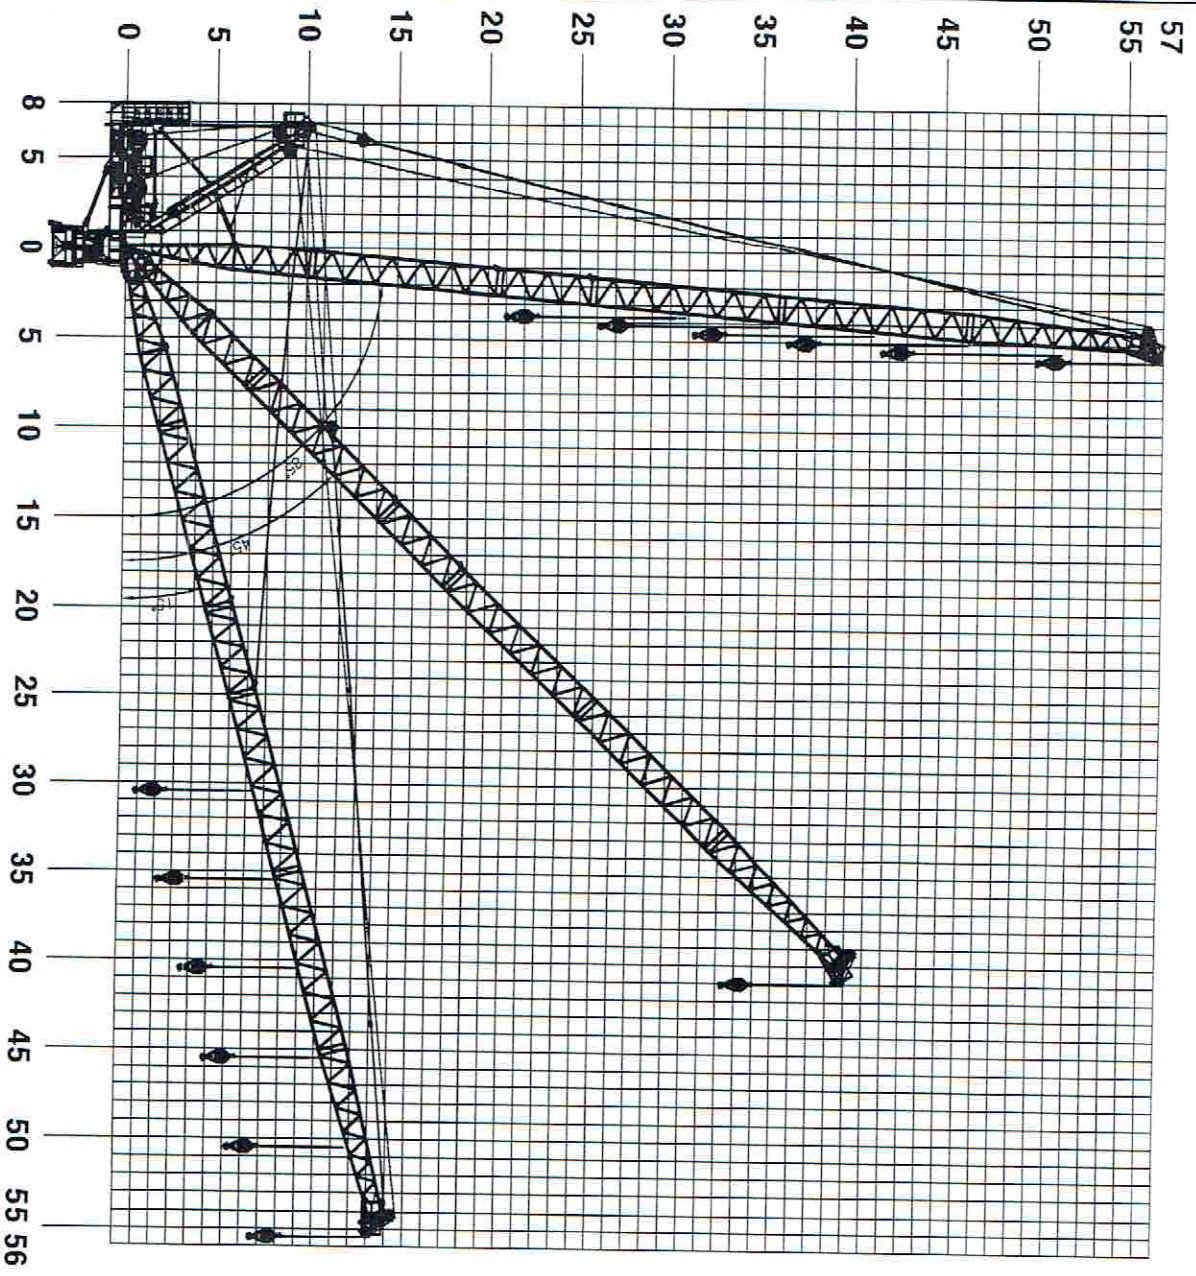

**KNF 336i Radius and Load diagram**

Length of boom Slewing radius	Max capacity m / ton	Radius and Load diagram															
		18	20	23	25	28	30	33	35	38	40	43	45	48	50	53	55
55m	8t - 25.0 m 8,00	8,00	8,00	8,00	8,00	7,60	7,10	6,75	6,20	5,75	5,00	4,65	4,40	4,10	3,90	3,65	3,50
	8t - 28,7 m 8,00	8,00	8,00	8,00	8,00	8,00	8,00	7,78	7,31	6,70	6,35	5,88	5,60	5,22	5,00		
50m	16t - 15,5 m 16,00	13,58	12,08	10,33	9,39	8,23	8,00	7,78	7,31	6,70	6,35	5,88	5,60	5,22	5,00		
	8t - 29,2 m 8,00	8,00	8,00	8,00	8,00	8,00	8,00	7,78	7,34	6,92	6,56	6,28	6,00				
45m	16t - 15,8 m 16,00	13,83	12,31	10,53	9,57	8,40	8,00	7,78	7,34	6,92	6,56	6,28	6,00				
	8t - 31,5 m 8,00	8,00	8,00	8,00	8,00	8,00	8,00	8,00	7,76	7,39	7,00						
40m	16t - 17,0 m 16,00	15,03	13,39	11,46	10,43	9,17	8,46	8,00	7,76	7,39	7,00						
	8t - 32,0 m 8,00	8,00	8,00	8,00	8,00	8,00	8,00	8,00	7,50								
35m	16t - 17,3 m 16,00	15,31	13,64	11,68	10,64	9,35	8,63	8,00	7,50								
	8t - 30,0 m 8,00	8,00	8,00	8,00	8,00	8,00	8,00	8,00									
30m	16t - 18,3 m 16,00	16,00	14,49	12,42	11,32	9,96	9,20										